



LILYPADS

TRACK & RAIL PRODUCTS



Material is 1/4" thickness and does not change cross level.




- HEAVY DUTY
- HARD WEARING
- LONG LASTING

FOR FROGS, DIAMONDS & BRIDGE STRUCTURES

Central Sales and Service, Inc. is the manufacturer and supplier of LILYPADS - rubber pads made to absorb the continuous impact and pressure created by railcar after railcar that destroys valuable Frogs, Diamonds, Trucks and Bridge Structures.

The specifications and design of our LILYPADS are engineered to ensure a pad that can endure this constant abuse for years.

LILYPADS are manufactured and cut to size at our facility located centrally in the United States.

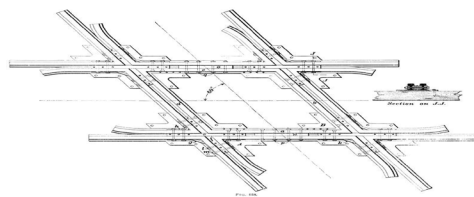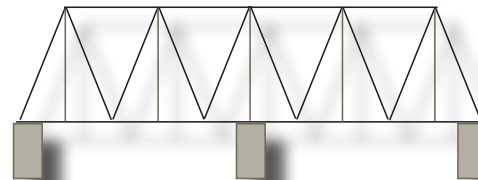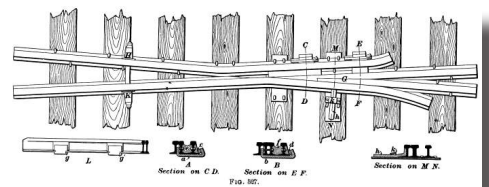

110 Industrial Court
Waverly, TN 37185
800.467.0568
Fax 931.296.1944
www.centralsales-service.com
ISO9001:2008 QMS

LOAD BEARING PADS



Elastomer/fabric reinforced pads used to lengthen the life of track parts such as frogs, diamonds, bridges and curves. Introducing a new safety feature for all railroads.

Load Bearing Pads

CENTRAL SALES AND SERVICE, INC.

SPECIFICATIONS:

DESCRIPTION- 4 ply 14 oz nylon fabric reinforced elastomeric pad for trough and mat, having a composite strength of 700 X 700 lbs/in. Minimum thickness 1/4"

Elastomeric compound to be EPDM meeting specification to Article 1052.02:

Duro Shore A of 55 duro ASTM D2240

Tensile Strength of 1500 psi ASTM D412

Elongation 200% ASTM D412

Compression Set 25% at 22 hr @70C ASTM D395

Low Temp Brittleness Pass ASTM D2137

Ozone Resistance No Cracks ASTM D1149

Central Sales and Service, Inc.

LILYPAD®

Referred to as Frog and Diamond Pads. Meets Illinois DOT specification for bearing pads for bridges and structure.

This Information is proprietary and it is hoped will be regarded as such
